



# Action Interloc II™ Floor System

SYSTEM TYPE: FLOATING RESILIENT



Two Layers 1/2" x 6" (12 mm x 150 mm) Subfloor Spacing (6&2) or optional (2&2)

Continuous Blanket Pad 3/4" (19 mm) thickness or optional 1/4" (6 mm)

**MFMA NORTHERN HARD MAPLE BY ACTION:**

Random Length (RL)  
Action Long Length (FJ)  
Expansion Ridge Technology (ERT)

**TESTING AGENCY:**

Certified by ISSS

**PERFORMANCE MEETS OR EXCEEDS:**

MFMA PUR  
EN 14904 Type 4  
DIN 18032 Part 2  
ASTM - F2772  
FIBA Level I

**SLAB DEPRESSION:**

25/32" (20 mm): 2-1/2" (64 mm)  
33/32" (27 mm): 2-3/4" (70 mm)

**LEED:**




FloorScore®-certified  
Proprietary certified EPD®  
FSC®-certified Maple and Subfloor available  
MR credits – based on products, selected materials and facility locations

**PERFORMANCE & SYSTEM STABILITY:**

- Uniform playing surface
- Excellent ball bounce
- SCORES Compliant
- Double layer 1/2"x6" subfloor system maximizes playing surface consistency



- Action Interloc II has a proven continuous subfloor design that delivers excellent athletic performance with the structural integrity to handle heavy rolling loads.
- Action InterLoc is available in various configurations, see individual specifications for Action InterLoc I, InteLoc II, InterLoc LP and InterLoc Plus for component and assembly data.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

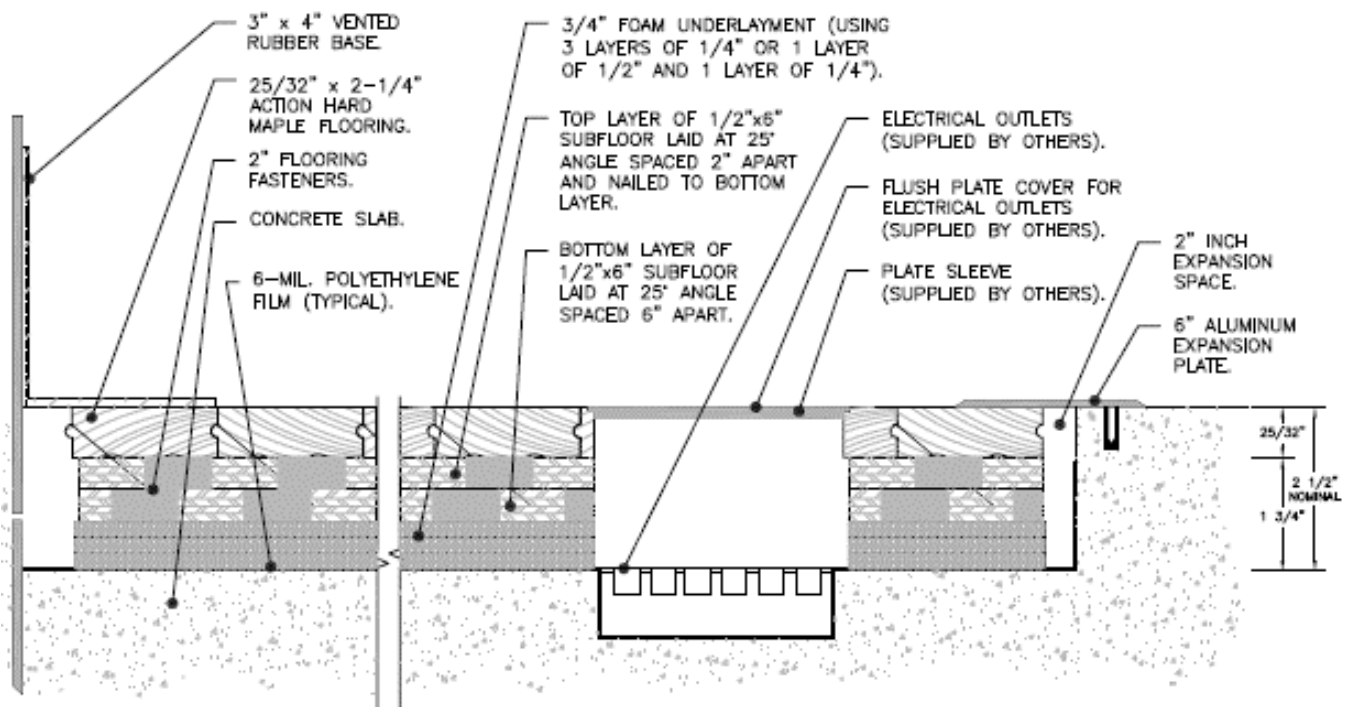

Complete product specifications and system drawings are available online at: [www.actionfloors.com](http://www.actionfloors.com)



ACTION FLOOR SYSTEMS, LLC  
4781 N. US Hwy 51 • Mercer, WI 54547

TOLL FREE: 800-746-3512 • VOICE: 715-476-3512  
FAX: 715-476-3585 • EMAIL: [info@actionfloors.com](mailto:info@actionfloors.com)

[actionfloors.com](http://actionfloors.com)

Rev 7/2017